



# TPC 150

## TOUCH PANEL COMPUTER

### Features

- 3rd Generation Intel® Core™ processors
- 2nd Generation Intel® Core™ processors
- Intel® H61 Express chipset
- 15" 1024x768 TFT LCD Panel with Touch Screen
- IP65 front panel protection
- 2 2.5" SATA drive bays
- 2 USB 2.0 at the front panel for easy access
- 5 function keys at the front panel
- Built-in antenna for optional Wi-Fi
- VESA/Wall/Panel Mount
- Optional Optical Drive
- Customisable Bezel
- Customisable Touch Screen

### System Specifications

### 3rd/2nd Generation Intel® Core™ processors

#### PROCESSOR SYSTEM

- Processors:
  - 3rd generation Intel® Core™ processors
  - 2nd generation Intel® Core™ processors
  - Supports up to 77W TDP
- Intel H61 Express chipset

#### MEMORY

- Two DDR3 1333/1600MHz SODIMM sockets (3rd generation processors)
- Two DDR3 1066/1333MHz SODIMM sockets (2nd generation processors)
- Supports up to 16GB system memory

#### LCD and TOUCH SCREEN

- 15" 1024x768 TFT LCD panel with touch screen
- Supports 5-wire Resistive Touch or 3M Surface Capacitive Touch
- 50,000 MTBF LED backlight
- Brightness (cd/m<sup>2</sup>): 250

#### GRAPHICS

- Intel® HD Graphics
- Display ports: HDMI and DVI-I
- HDMI and DVI-I display resolution up to 1920x1200

#### STORAGE

- 2 2.5" SATA drive bays
- 1 optical drive bay (optional)

#### ETHERNET

- 1 Intel W82579LM Gigabit Ethernet Controllers
- 1 Intel W82574L Gigabit Ethernet Controllers

#### AUDIO

- Realtek ALC886 5.1-channel High Definition Audio
- Two 3W speakers

#### COM

- 1 RS232/422/485 COM port
- 1 RS232 COM port

#### USB

- 2 Type A USB 2.0/1.1 ports at the front panel
- 4 Type A USB 2.0/1.1 ports at the bottom

#### I/O

- Front
  - 2 Type A USB 2.0/1.1 ports
  - 5 function keys
  - 3 LED indicators: Power, HDD, Alarm
  - 1 built-in antenna
- Bottom
  - 1 DB-9 RS232/422/485 COM
  - 1 DB-9 RS232 COM
  - 1 PS/2 keyboard
  - 1 PS/2 mouse
  - 4 Type A USB 2.0/1.1
  - 3 audio jacks: Mic-in, Line-in, Line-out
  - 2 RJ45 LAN with LEDs
  - 1 DVI-I
  - 1 HDMI
  - 1 power switch

#### EXPANSION

- 1 PCIe x1 slot
- 1 PCI slot
- 2 Mini PCIe slots

#### POWER

- Power type
  - ATX
- Power input voltage
  - AC 100-240V, 3.5A, 250W

#### COOLING SYSTEM

- Smart fan system control suitable for quiet environments

#### ENVIRONMENT

- Temperature
  - Operating: -10°C ~ 50°C
  - Storage: -20°C ~ 60°C
- Relative Humidity
  - 90% RH at 50°C, 1 week
- Corrosion
  - 4 periods of 7 days at 50°C with 90-95% relative humidity after 2 hours salt spray or waiver

#### VIBRATION

- Operating: 1G, 5~500Hz
- Non-operating: 1.5G, 5~25Hz
- IEC 68-2-64 compliant

#### SHOCK

- Operating: 3G peak acceleration (11 msec. duration)
- Non-operating: 10G peak acceleration (11 msec. duration)
- IEC 68-2-27 compliant

#### FRONT PANEL PROTECTION

- IP65 (Dust Tight; Water Proof protection)

#### CONSTRUCTION

- Aluminum front bezel (Stainless steel: option)
- Rear panel: sheet metal

#### MOUNTING

- VESA mount: 75x75 and 100x100
- Wall mount bracket (option)
- Panel mount: mounting clamp (option)

#### DIMENSIONS

- 410mm x 320mm x 106mm (W x H x D)

#### WEIGHT

- 7.8 kg


#### OS SUPPORT

- Windows XP Pro (WES2009)
- Windows Vista
- Windows 7 (WS7P)
- Windows 8 and Windows 8 Embedded
- Linux Ubuntu 13


#### CERTIFICATION

- CE
- FCC Class A
- RoHS

# Panel

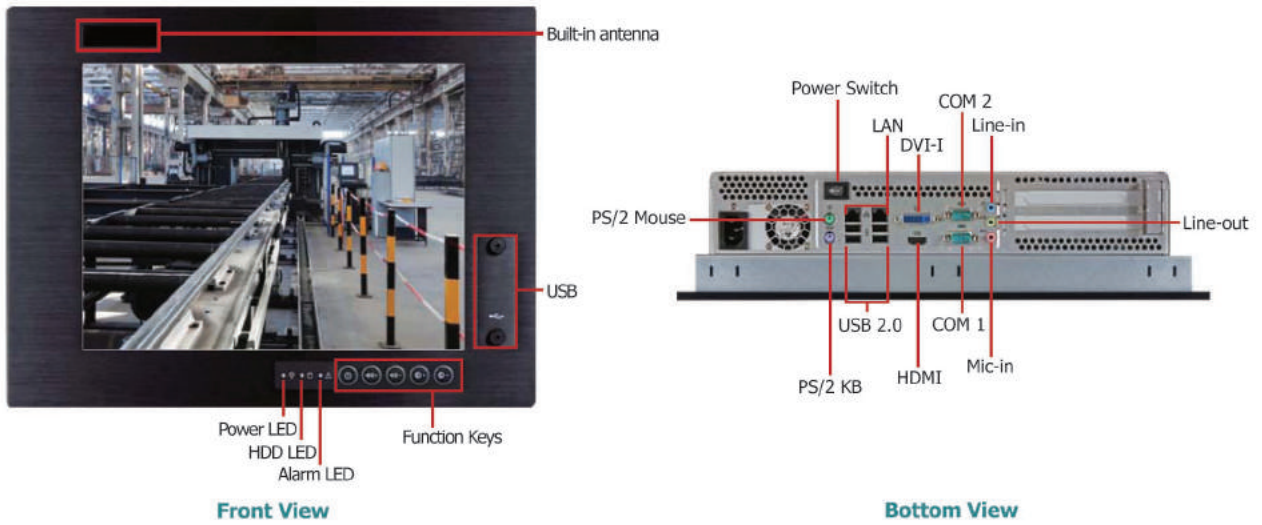

# Dimensions

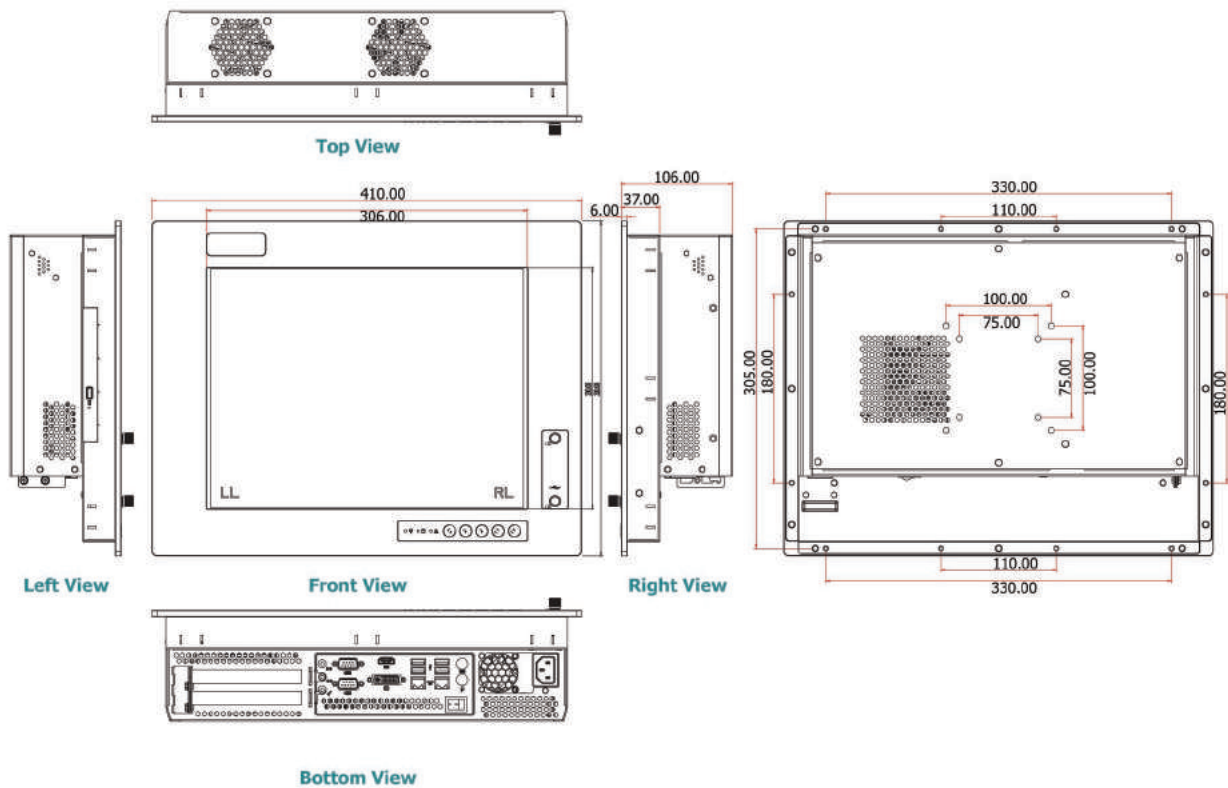

**CAPTEC**

[www.capttec-group.com](http://www.capttec-group.com)

EMEA Office  
Hampshire, PO15 5TX, UK

North America Office  
Ontario, N3H 4R7, Canada

T: +44 (0)1489 866 066  
F: +44 (0)1489 866 088  
E: [sales@uk.capttec-group.com](mailto:sales@uk.capttec-group.com)

T: +1 (519)650-4000  
F: +1 (519)650-2000  
E: [sales@ca.capttec-group.com](mailto:sales@ca.capttec-group.com)



130214-1 © Capttec Ltd. 2013 All rights reserved - All products and company names listed are trademarks or trade names of their respective companies

