

SRS-02

2U High Performance Rugged Server



Key Benefits


- ▶ Tough, lightweight aluminium chassis designed to meet to MIL-STD-810H and DO-160G shock and vibration standards for use in challenging environments
- ▶ High performance 3rd Generation Intel® Xeon®, Intel® Core™ and AMD EPYC™ processor options
- ▶ Rear panel offering a variety of military connectors, fully configurable to customer specification
- ▶ Extensive removable solid state NVMe storage for high capacity rugged applications
- ▶ AC or DC power supply options to suit a wide range of deployments
- ▶ Long life, embedded processor options for extended through-life support

Overview

The Captec SRS-02 Rugged Storage Server offers high processing performance in a 19" rackmount form factor. Featuring expansion to enable a range of additional connectivity such as 10Gb/s copper, or secure fibre interfaces are available up to 100Gb/s, giving high bandwidth for connecting data around the wider system. Enhanced EMI filtering combined with a rugged aluminium chassis provides a low EMI signature, suitable for use in TEMPEST environments. Captec Rugged Servers are designed, built, and formally qualified to meet your exact specification requirements and required military standards, some of which may include MIL-STD-810H, MIL-STD-461G and DO-160G, for use in challenging defence applications.

Specifications

SRS-02	A typical configuration could consist of:	SRS-02	Continued:
CPU	2 x 3rd Generation Intel® Xeon® Silver 4310T Processor, 10 Core (2.3/3.4GHz), 15MB Cache	Operating System	Windows / Linux
Chipset	Intel® C621A	Power Consumption	<700W Max
Memory	Up to 4TB 3DS ECC LRDIMM	Input Voltage	18 ~ 60V DC (depending on configuration) Optional 100-240V AC
Storage (External)	16 x 2.5" SATA/SAS removable drives (7mm height) via Broadcom MegaRAID	Width / Mounting	19" Rackmount
Storage (Internal)	NVMe (M.2 PCIe 4.0)	Height	2U
Expansions Slots	2 x PCIe 4.0 x16 (1 x used by MegaRAID)	Depth	649mm (from rear of mounting ears, not including rear connectors)
LAN	2 x 10Gb Copper (MIL-STD 38999)	Dimensions	88.1 x 482.6 x 649 mm (H x W x D)
Service Port	MIL-STD 38999 containing: 1 x VGA, 1 x IPMI & 2 x USB 2.0	Weight	Approx 16Kg (depending on configuration)
Video	Integrated ASPEED AST2500	Operating Temperature	-20°C to +55°C
Audio	N/A	Environmental	Designed to Meet: MIL-STD-461, MIL-STD-810H, DO-160G, Vibration Tested to JSS55555, Shock 50g, 11ms, 22g, 11ms

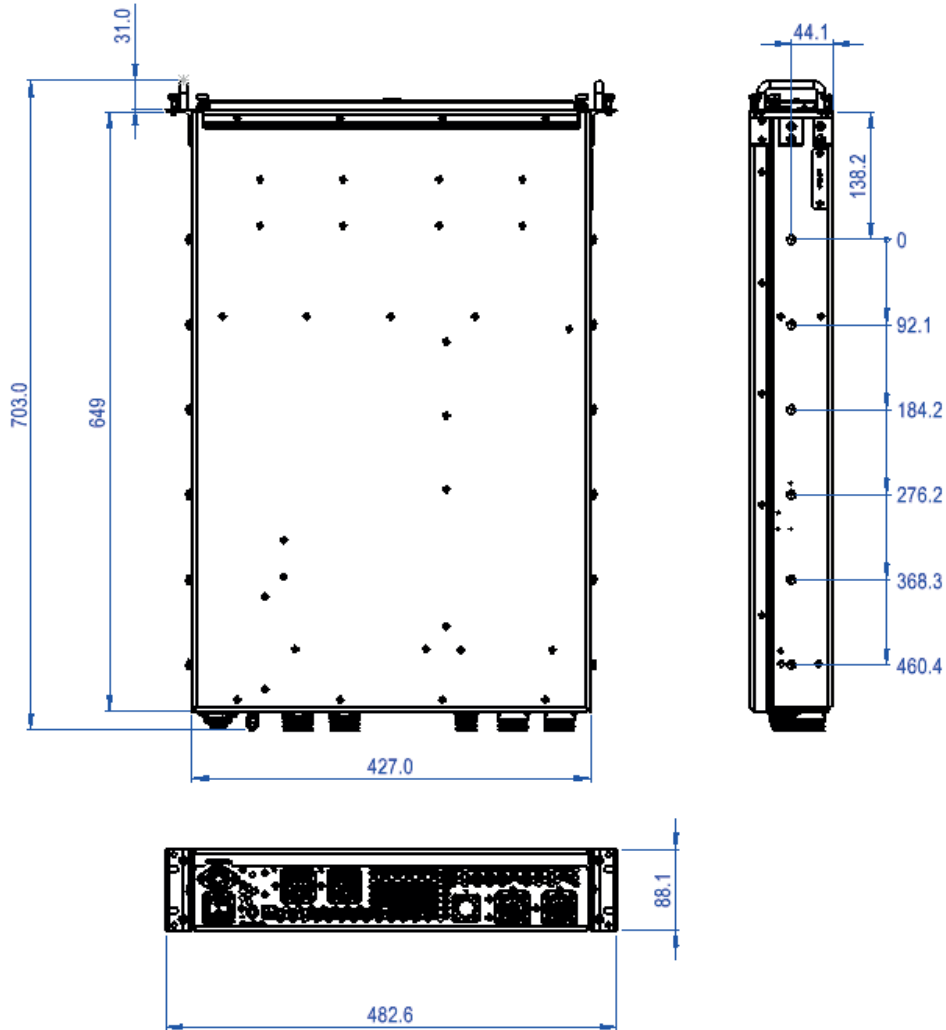

Delivering end-to-end, like no one else.
Bring us your challenge & experience the difference.

EMEA and Group Headquarters
+44 (0) 1489 866 066
sales-emea@captec-group.com

UK Subsystems
+44 (0) 1252 512 919
sales-cse@captec-group.com

Canada Headquarters
+1 (519) 650 4000
sales-canada@captec-group.com

USA Headquarters
+1 (519) 650 4000
sales-usa@captec-group.com